

Data sheet

flowIQ® 2200

- Your advanced smart water meter for maximum insights
- Acoustic Leak Detection in service connections
- Nominal flow from 1.6 m³/h up to 10 m³/h
- Approved with dynamic range up to R1600
- Pinpoint accuracy over the meter's entire lifetime
- Integrated communication
 - Wireless M-Bus C1/C2/T1
 - linkIQ®
 - LoRaWAN®
 - NB-IoT
- Wired interface for selected modules
 - Communication with flowIQ® Gateway
 - Configuration of volume pulses
- External antenna option
- Intelligent info codes assist you with your operations, asset management and customer service
- Water and ambient temperature measurement
- Up to 20 years of battery life time
- Designed for operation in submerged environments



Contents

Taking smart metering to the next level	3
Approved meter data	4
Technical data	4
Materials	5
Pressure loss	5
Meter sizes	6
Display and Info codes	8
Core features	9
Data registers	10
Integrated communication	11
Wired interface	12
Antenna options	13
Ordering details	14
Configuration	17
Accessories	18

Taking smart metering to the next level

flowIQ® 2200 raises the bar for static ultrasonic water meters. The series includes several variants, identified by prefixes such as KWM2230.

Built on more than 30 years of experience, the meter provides modern water utilities with the knowledge needed to make informed decisions and prioritize daily efforts.

flowIQ® 2200 introduces integrated Acoustic Leak Detection. Acting like a fine-meshed network of noise loggers, the meter monitors the surrounding pipes and detects noise patterns and acoustic changes that indicate potential leaks. Thanks to the low minimum cut-off flow down to 0.9 L/hour for some of the smallest meter sizes, flowIQ® 2200 measures even the smallest consumption, enabling early leak detection through constant night flow monitoring and helping reduce non-revenue water.

The meter has no moving parts, making it less sensitive to impurities and wear, ensuring longer lifetime and more stable performance than mechanical meters.

The flowIQ® 2200 series offers multiple battery options depending on communication and lifetime needs, with up to 20 years of battery life.

Key features include intelligent alarms and info codes, temperature measurements, and consumption profiles. Some modules include a wired interface, which enables connection to flowIQ® Gateway, supporting various plug-in communication modules.

These features ensure accurate billing, improved data quality, and reduced non-revenue water. Through its integrated Acoustic Leak Detection, flowIQ® 2200 can improve return on investment by enabling rapid leak identification and reducing the operational risks associated with leaks. This functionality is particularly valuable in distribution zones with high levels of non-revenue water, where early leak detection can significantly improve network efficiency and reduce losses.

Hygiene

Security and hygiene are high-priority areas within both development and production.

Our water meters are approved for use with drinking water and are disinfected, dried and packed in airtight packaging to prevent environmental impact before installation. We continuously verify disinfection effectiveness through frequent internal and external audits by accredited laboratories to ensure that only water meters of the highest quality leave our production facilities.



The wired interface is plug-and-play for connection to flowIQ® Gateway.



Some meter sizes come in a warm water version.

Platform overview



flowIQ® 2200 (KWM2231).
Composite meter powered by
2 A-cell batteries.



flowIQ® 2200 (KWM2230)
Composite meter – comes with
or without wired interface and is
powered by one D-cell battery.



flowIQ® 2200 (KWM3230) Stainless
steel with or without wired interface
and powered by one D-cell battery.

Approved meter data

MID classifications according to MID 2014/32/EU, based on OIML R 49/ISO 4064

Approval

flowIQ® 2200 - KWM2231: DK-0200-MI001-041
 flowIQ® 2200 - KWM2230: DK-0200-MI001-038
 flowIQ® 2200 - KWM3230: DK-0200-MI001-039

Mechanical environment

Class M1

Electromagnetic environment

flowIQ® 2200 - KWM2231, KWM2230, KWM3230: Class E2

OIML R 49 designations

Accuracy class

2

Sensitivity class

U0/D0

Ambient class

Fulfils OIML R 49 class B and O (building/outdoor)

Water temperature, cold water

0.1...30 °C (T30) or 0.1...50 °C (T50)

Water temperature, warm water

0.1...70 °C (T70) (selected meter sizes only)

Ambient temperature range

5...55 °C, condensing humidity
 (Mounted indoors in utility rooms and outdoors in meter pits – mounting in direct prolonged sunlight must be avoided)

Meter types

- Composite (KWM2231, KWM2230) $Q_3 = 1.6 \text{ m}^3/\text{h}$, $2.5 \text{ m}^3/\text{h}$ and $4.0 \text{ m}^3/\text{h}$
 - Stainless steel (KWM3230) $Q_3 = 2.5 \text{ m}^3/\text{h}$, $4.0 \text{ m}^3/\text{h}$, $6.3 \text{ m}^3/\text{h}$ and $10.0 \text{ m}^3/\text{h}$

Radio communication

RED (Radio Equipment Directive)

Drinking water approvals

KIWA, KTW-BWGL, ACS
 (All parts are suitable for drinking water)

Technical data

Electrical data

Battery

3.65 VDC lithium
 - 2 x A-cell, flowIQ® 2200 (KWM2231)
 - 1 x D-cell, flowIQ® 2200 (KWM2230 & 3230)

Battery lifetime

2 x A-cell (KWM2231)

D-cell (KWM2230, KWM3230)

Up to 16 years } depending on selected data package and ambient installation temperature
 Up to 20 years }

EMC data

Fulfils MID class: E1 and E2

MID approved electronic operating temperature range

-25...55 °C

Mechanical data

Metrological class

2

Ambient class

Fulfils OIML R 49 class B and O (building/outdoor)

Ambient temperature

2...55 °C

Protection class

IP68

Impact energy levels (KWM2230, KWM3230)

IK08 according to IEC62262 / IK07 for wired interface

Storage temp. empty sensor (dry meter)

-25...60 °C (< 40 °C for a prolonged storage time)
 Specially for APET packaging: A packaged water meter must not be stored at temperatures > 40 °C for periods exceeding 24 hours

Pressure stage

PN16

Connection


Thread EN/ISO 228-1

Materials

Wetted parts

Meter flow parts, composite	PPS with 40 % fibreglass reinforcement
Meter flow parts, metal	Stainless steel, W.no. 1.4408
Measuring pipe	PPS with fibreglass [40 %] reinforcement
Reflectors	Stainless steel, W.no. 1.4401 and 1.4404 [316/316L]
O-ring/gasket	EPDM
Strainer	PES and PPO

Pressure loss

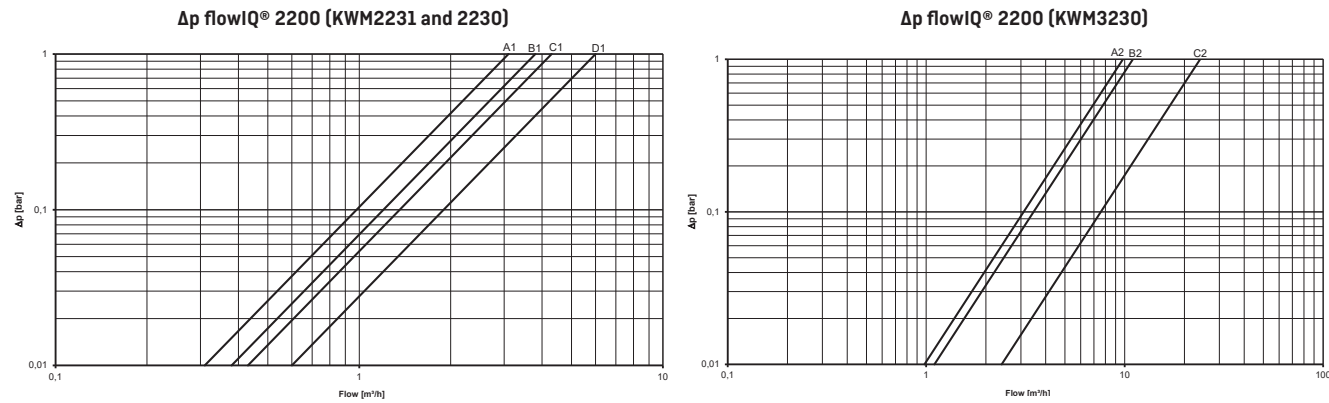

Meter variant	Graph	Q ₃ [m³/h]	Nom. diameter	kv	Q @ 0.63 bar [m³/h]
KWM2231 & 2230	A1	1.6	¾" (DN15)	3.4	2.5
KWM2231 & 2230	B1	2.5	¾" (DN15)	4.2	3.0
KWM2231 & 2230	C1	2.5	1" (DN20)	4.4	3.4
KWM2231 & 2230	D1	4.0	1" (DN20)	6.3	4.8
KWM3230	A2	2.5 4.0 6.3	1" (DN20)	11.1	8.7
KWM3230	B2	4.0 [3B]	1¼" (DN25)	11.1	7.8
KWM3230	C2	4.0 6.3 10.0	1¼" (DN25)	24.7	19

Meter sizes

flowIQ® 2200 composite (KWM2231) is available in these combinations:

Meter type	Nom. flow Q ₃ [m³/h]	Min. flow Q ₁ [L/h]	Max flow Q ₄ [m³/h]	Min. cutoff [L/h]	Q at Δp 1 bar (kv) [m³/h]	Pressure loss Δp at Q ₃ [bar]	Dynamic range	Connection on meter and length [mm]
2A	2.5	25	3.1	1.5	4.4	0.17	100	G1B 105
2B	2.5	25	3.1	1.5	4.4	0.17	100	G1B 130
2C	4.0	40	5.0	2.0	6.3	0.4	100	G1B 130
2D	2.5	25	3.1	1.5	4.4	0.17	100	G1B 190
2E	4.0	40	5.0	2.0	6.3	0.4	100	G1B 190
2F	4.0	40	5.0	2.0	6.3	0.4	100	G1B 105
1A	1.6	6.4	2.0	0.9	3.4	0.17	250	G¾B 110
1B	2.5	10	3.1	1.5	4.2	0.17	250	G¾B 110
1D	2.5	10	3.1	1.5	4.2	0.17	250	G¾B 170
1F	2.5	10	3.1	1.5	4.2	0.17	250	G¾B 165
2A	2.5	10	3.1	1.5	4.4	0.17	250	G1B 105
2B	2.5	10	3.1	1.5	4.4	0.17	250	G1B 130
2C	4.0	16	5.0	2.0	6.3	0.4	250	G1B 130
2D	2.5	10	3.1	1.5	4.4	0.17	250	G1B 190
2E	4.0	16	5.0	2.0	6.3	0.4	250	G1B 190

flowIQ® 2200 composite (KWM2230) is available in these combinations:

Meter type	Nom. flow Q ₃ [m³/h]	Min. flow Q ₁ [L/h]	Max flow Q ₄ [m³/h]	Min. cutoff [L/h]	Q at Δp 1 bar (kv) [m³/h]	Pressure loss Δp at Q ₃ [bar]	Dynamic range	Connection on meter and length [mm]
1A	1.6	10	2.0	0.9	3.4	0.27	160	G¾B 110
2A	2.5	15.6	3.1	1.5	4.4	0.44	160	G1B 105
2D	2.5	15.6	3.1	1.5	4.4	0.35	160	G1B 190
1A	1.6	4.0	2.0	0.9	3.4	0.27	400	G¾B 110
1B	2.5	6.3	3.1	1.5	4.2	0.44	400	G¾B 110
2A	2.5	6.3	3.1	1.5	4.4	0.35	400	G1B 105
2B	2.5	6.3	3.1	1.5	4.4	0.35	400	G1B 130
2C	4.0	10	5.0	2.0	6.3	0.44	400	G1B 130
2D	2.5	6.3	3.1	1.5	4.4	0.35	400	G1B 190
2E	4.0	10	5.0	2.0	6.3	0.44	400	G1B 190

Meter sizes

flowIQ® 2200 metal (KWM3230) is available in these combinations:

Meter type	Nom. flow Q ₃ [m ³ /h]	Min. flow Q ₁ [L/h]	Max flow Q ₄ [m ³ /h]	Min. cutoff [L/h]	Q at Δp 1 bar (kv) [m ³ /h]	Pressure loss Δp at Q ₃ [bar]	Dynamic range	Connection on meter and length [mm]
2D	2.5	25	3.1	3	11.1	0.05	100	G1B 190
2D	2.5	15.6	3.1	3	11.1	0.05	160	G1B 190
3B	4.0	25	5	3	11.1	0.17	160	G1¼B 175
3C	4.0	25	5	5	24.7	0.03	160	G1¼B 260
3D	6.3	40	7.8	5	24.7	0.07	160	G1¼B 260
3E	10	63	12.5	5	24.7	0.17	160	G1¼B 260
2E	4.0	16	5	3	11.1	0.13	250	G1B 190
3D	6.3	25.2	7.8	5	24.7	0.07	250	G1¼B 260
2J	6.3	15.8	7.8	3	11.1	0.33	400	G1B 190
3E	10	25	12.5	5	24.7	0.17	400	G1¼B 260


See the section "Ordering details" for combination possibilities.

Measurements occur in the range from 'Min. cutoff' to 'Max cutoff' – however, the accuracy is only guaranteed in the range from Q₁ to Q₄. The kv value expresses how much water can pass through a meter at a given pressure drop, and therefore indicates the maximum achievable flow rate. At around 1 bar Δp, cavitation may occur inside the meter, which can impair measurement accuracy.

Display and Info codes

The large display of flowIQ® 2200 showing totalized volume, flow rate and intuitive info codes make it easy for end users to understand their own consumption data.

flowIQ® 2200 includes a large number of intelligent info codes and alarms. An info code indicates a special condition in the meter. If the info code is available in the display, the related symbol is on when it has been activated. If the 'condition' is not active, the sign is off. The info codes provide you with the exact knowledge you need to target your efforts within operation optimization, customer information, water loss and tampering.

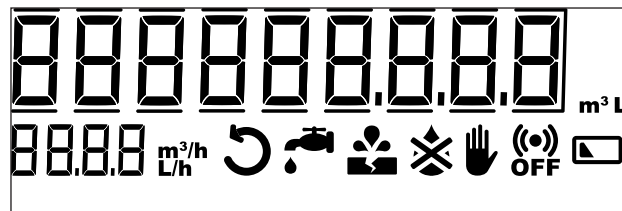

The info codes in the display have the following meaning and function:

Info icon	Condition
	The water in the meter has not been stagnant for more than one continuous hour during the last 24 hours. This can be a sign of a leakage downstream the meter such as a leaky faucet, toilet cistern or pipe leakage.
	The water consumption has been consistently high for half an hour, which indicates a pipe burst downstream of the meter.
	Attempt at fraud. The meter is no longer valid for billing.
	The meter is not filled with water. In this case, nothing will be measured.
	The water flows through the meter in the wrong direction.
	RADIO OFF flashes. The meter is still in transport mode with the built-in radio transmitter turned off. The transmitter turns on automatically when the first liter of water has run through the meter.
	RADIO OFF lights continuously. The radio is switched off permanently. Can be activated via METERTOOL.
	The symbol appears when the expected capacity left is 6 months [or when the voltage drops below a specific voltage].



Switch off automatically when the conditions that activated them no longer exist.



Disappears when the water has been stagnant for one hour.



Disappears when the consumption falls to normal level.



Disappears when the water is no longer flowing in the wrong direction.



Disappears when the meter is filled with water.

Core features

Water meters placed throughout the network make it possible to gather information that can be of vital importance for an effective water supply, asset management and improved customer service.

Acoustic Leak Detection*

The flowIQ® 2200 water meter introduces integrated Acoustic Leak Detection that allows you to monitor your service connections for possible leaks. Like a fine-meshed network of noise loggers, all your meters monitor the noise in the distribution lines and service connections to detect possible leaks.

In other words, you can let your meters work for you instead of installing separate noise loggers all around your supply area.

**Not available for warm water meters.*

Current flow display

Besides the consumed volume, flowIQ® 2200 also shows the current flow in the display. The flow display has been designed with user experience in mind, where it can be advantageous, for example during installation, to be able to see the current consumption. In this context, it is important to stress that the metrological approval of the water meter is related to the volume reading only.

Temperature monitoring

flowIQ® 2200 measures water and ambient temperatures, respectively. Information on temperatures above or below configurable values in the meter will warn the utility about any potential high and low temperature issues.

The measurements can be used to monitor the installation and to give an indication if something is unusual.

Consumption above legal flow range

The meter logs information on consumption above the legal flow range. This information can be used to indicate if the meter size of a given installation is correct.

Consumption profile

The meter tracks consumption in different flow intervals for further analysis of the consumption patterns of the specific installation.

No consumption

If no consumption has been measured for a long period of time in a household installation, an info code will inform the utility as this indicates that there might be a problem with the installation.

Data registers

The water meter has a permanent memory in which the values of various data loggers are saved. The loggers can be read via the meter's optical eye.

The following registers are logged:

Description	Yearly logger	Monthly logger	Daily logger	Hourly logger
Logger depth	20 years	36 months	460 days	2400 hours
Operating hours	✓	✓	✓	✓
Info codes incl. hour counter	✓	✓	✓	✓
Volume	✓	✓	✓	✓
Volume reverse	✓	✓	✓	✓
Acoustic noise value day			✓	
Flow max incl. date	✓	✓		
Flow min. incl. date	✓	✓		
Flow max incl. timestamp			✓	
Flow min. incl. timestamp			✓	
Water temp. max	✓	✓	✓	
Water temp. min.	✓	✓	✓	
Water temp. avg.	✓	✓	✓	
Ambient temp. max	✓	✓	✓	
Ambient temp. min.	✓	✓	✓	
Ambient temp. avg.	✓	✓	✓	

Every time the information code changes, the date and info codes are logged. Thus, it is possible to data read the latest 50 changes of the information code as well as the date the change was made. Reading is only possible via the optical IR interface.

Integrated communication

The meter supports a variety of different communication options depending on meter type and country code. All meters can be used with Kamstrup's external antenna, except for meters with wired interface. Transmission properties and data packages are defined in the configuration number YY-ZZZ. These can be changed with METERTOOL through the optical IR interface.

Wireless M-Bus

Wireless M-Bus is an unlicensed European frequency standard protocol. Kamstrup water meters utilize the C1/C2-mode and support T1-BSI/OMS. Kamstrup Wireless M-Bus is transmitting every 16 seconds (drive-by) or every 96 seconds (fixed network).

Encryption for Wireless M-Bus is done in accordance with AES 128 standard.

linkIQ®

linkIQ® is a Kamstrup developed communication protocol. The linkIQ® protocol ensures the potential for a future-proof, robust and competitive communication network. By utilizing the linkIQ® protocol, high data performance can be achieved. linkIQ® is a "multi-channel-protocol" that can communicate on the 868 MHz band, which has 8 channel changes and retransmission of previously transmitted data.

Besides the linkIQ® transmission the meter can also send a small Wireless M-Bus data package for fallback drive-by readings.

LoRaWAN®

LoRaWAN® (Long Range Wide Area Network) is an open technology with wide adaptation and as such not tied to a company. It can be rolled out as a public or private network. The technology is ready and available and has the benefit of long range and low-cost hardware. Automatic meter reading using a LoRaWAN® network delivers frequent consumption data to your customers from the meters installed at their premises.

NB-IoT

NB-IoT (Narrow Band Internet of Things) is an emerging communication technology offered by almost all main mobile operators (telcos) in the world. Unlike 2G, 3G and 4G, which are designed for high-speed communications at the expense of high-power consumption, NB-IoT supports low data rate communications, but in return offers superior power efficiency and this feature makes battery operation possible.

Sigfox

Sigfox is a global communications service provider that specializes in low-power wide-area network (LPWAN) technology for Internet of Things (IoT). It enables devices to connect and transmit small amounts of data over long distances while consuming minimal energy, making it ideal for applications like smart water meter solutions. Sigfox operates a dedicated network, allowing for scalable and cost-effective connectivity solutions for millions of devices.

Wired M-Bus

Wired M-Bus is a standardized communication solution for flowIQ® 2200 and flowIQ® 3200, designed according to EN 13757. It supports reliable two-wire communication, secure data transfer, and straightforward integration into both new and existing metering infrastructures.

For detailed information regarding all of the above and data packages, please contact Kamstrup.

Note: Integrated radio communication is always active, independent of utilization of the wired interface.

Wired interface

flowIQ® Gateway

All flowIQ® 2200 meters (KWM2230 & KWM3230) can be ordered with built-in Wired Interface on the front of the meter, through the front glass. The construction does not compromise the IP68 approval.

The wired interface is a serial communication for connecting to flowIQ® Gateway.

flowIQ® Gateway is a modular and upgradeable device which allows multiple communication and power options (for details, see the flowIQ® Gateway data sheet on www.kamstrup.com).

Pulse output options

It is possible to change the wired interface from serial communication to send volume pulses. This can be done by utilizing the optical IR interface and METERTOOL.

It is also possible to choose different pulse values and pulse lengths.

METERTOOL options

METERTOOL drop-down menu
Disabled
1 [L/imp]
10 [L/imp]
100 [L/imp]
1000 [L/imp]
imp/L depending on meter size Q ₃ Kamstrup meter pulses
Serial KMP

The pulse length is linked to the output pulse configuration and can be programmed to settings shown in the table below.

Pulse length options


3.9 ms	Recommended for Kamstrup meter pulses
10 ms	
32 ms	
100 ms	
250 ms	



On the cable connected to the wired interface, the pulse output is between the black and the red wire. The green wire is not used for pulses.

Wired interface


Solution overview

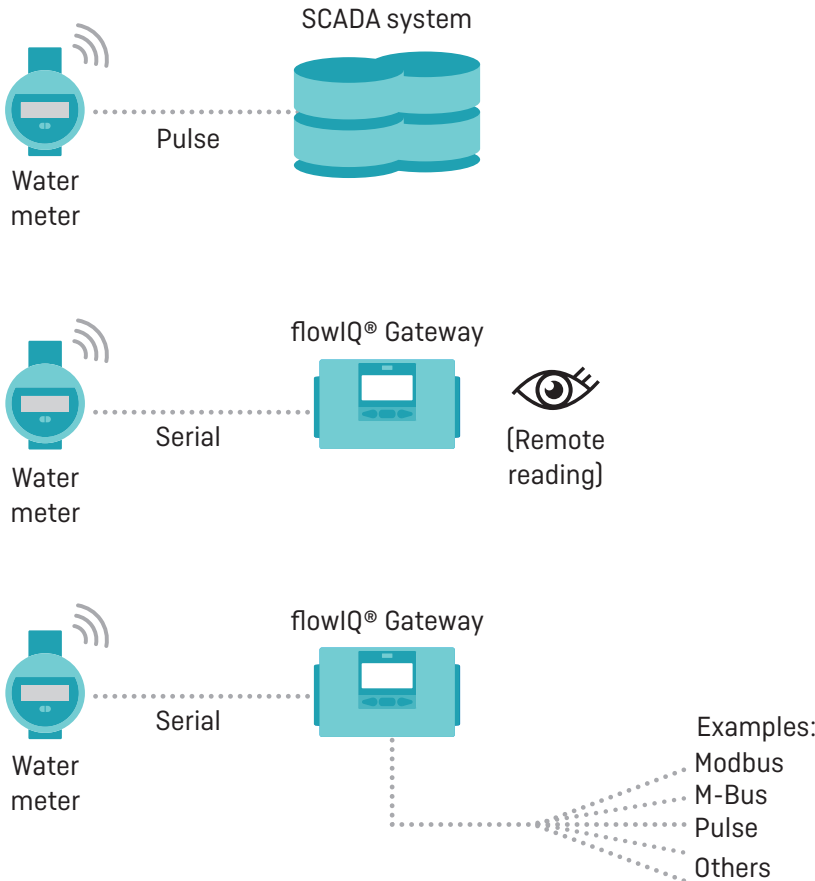

Antenna options

In installation scenarios where better radio signals are needed, external antennas are available for several flowIQ® 2200 meters with Wireless M-Bus/linkIQ®, LoRaWAN® OMS and NB-IoT. External antennas are not offered to meters with wired output. This is defined by the module choice in the type number (see ordering details).

Meters with wired interface include:



To gain an overview of Kamstrup's antenna options, please see FILE100001862.

Ordering details

An order is initiated by stating the type number of the selected model of flowIQ® 2200.

The type number includes information on meter type, meter size, meter length, battery supply, country code, etc.

Subsequently, the meter configuration, which determines customer-specific requirements, is selected.

Finally, required accessories, if any, in the form of gaskets, different extension pipes, check valve and standard couplings are selected.

Accessories are enclosed separately to be mounted by the installer.

flowIQ® 2200

KWM2231-

□ □

□

□ □

□

□

□ □

□

□ □

Meter generation

Second generation

02

Mechanical design

Composite PPS

K

Communication module

Wireless M-Bus C1/C2/T1, linkIQ®, 868 MHz

52

Sigfox Class 0, RC1 ¹⁾

18

LoRaWAN® OMS ¹⁾

73

Power supply

2 x A-cell

A

Dynamic range (for selected sizes)

100

A

250

C

Meter size

¾" 110 mm, 1.6 m³/h

DN15

cold/warm

1A

¾" 110 mm, 2.5 m³/h

DN15

cold/warm

1B

¾" 170 mm, 2.5 m³/h

DN15

cold

1D

¾" 165 mm, 2.5 m³/h

DN15

cold

1F

1" 105 mm, 2.5 m³/h

DN20

cold

2A

1" 130 mm, 2.5 m³/h

DN20

cold/warm

2B

1" 130 mm, 4.0 m³/h

DN20

cold/warm

2C

1" 190 mm, 2.5 m³/h

DN20

cold

2D

1" 190 mm, 4.0 m³/h

DN20

cold

2E

1" 105 mm, 4.0 m³/h

DN20

cold

2F

Meter type

Warm water meter

7

Cold water meter

8

Country code

XX

¹⁾ Not available for warm water meters

The country code is used for:

- Language and approval on type label
- Temperature class for the water meter, cold water (T30 and T50) and warm water (T70)

Ordering details

flowIQ® 2200

KWM2230-

□ □

□

□ □

□

□

□ □

□

□ □

Meter generation

Second generation

02

Mechanical design

Composite PPS

K

Communication module

Wired M-Bus

32

linkIQ® – Wireless M-Bus, for antenna connection (no wired output)

60

Wireless M-Bus C1/T1, linkIQ®, 868 MHz - Cold (wired output) ¹⁾

61

Wireless M-Bus C1/T1, linkIQ®, 868 MHz - Warm (wired output) ¹⁾

62

NB-IoT

82

Power supply

D-cell

D

Dynamic range (for selected sizes)

R160

B

R400

E

Meter size

¾" 110 mm, 1.6 m³/h

DN15

cold/warm

1A

¾" 110 mm, 2.5 m³/h

DN15

cold

1B

1" 105 mm, 2.5 m³/h

DN20

cold/warm

2A

1" 130 mm, 2.5 m³/h

DN20

cold

2B

1" 130 mm, 4.0 m³/h

DN20

cold

2C

1" 190 mm, 2.5 m³/h

DN20

cold/warm

2D

1" 190 mm, 4.0 m³/h

DN20

cold

2E

Meter type

Warm water meter

7

Cold water meter

8

Country code

XX

¹⁾ Default setting (serial communication for flowIQ® Gateway) cold/warm

The country code is used for:

- Language and approval on type label
- Temperature class for the water meter, cold water (T30 and T50) and warm water (T70)

Ordering details

flowIQ® 2200			KWM3230-	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐		
Meter generation				02		L												
Second generation																		
Mechanical design						L												
Stainless steel																		
Communication module																		
Wired M-Bus																		
linkIQ® – Wireless M-Bus, for antenna connection (no wired output)																		
Wireless M-Bus C1/T1, linkIQ®, 868 MHz - Cold (wired output) ¹⁾																		
Wireless M-Bus C1/T1, linkIQ®, 868 MHz - Warm (wired output) ¹⁾																		
NB-IoT ²⁾																		
Power supply																		
D-cell																		
Dynamic range (for selected sizes)																		
R100																		
R160																		
R250																		
R400																		
Meter size																		
1" 190 mm, 2.5 m³/h		DN20	cold															2D
1" 190 mm, 4.0 m³/h		DN20	cold															2E
1" 190 mm, 6.3 m³/h		DN20	cold															2J
1¼" 175 mm, 4.0 m³/h		DN25	cold															3B
1¼" 260 mm, 4.0 m³/h		DN25	cold/warm															3C
1¼" 260 mm, 6.3 m³/h		DN25	cold/warm															3D
1¼" 260 mm, 10 m³/h		DN25	cold															3E
Meter type																		
Warm water meter																		7
Cold water meter																		8
Country code																XX		

¹⁾ Default setting (serial communication for flowIQ® Gateway) cold/warm

²⁾ Not available for warm water meters

The country code is used for:

- Language and approval on type label
- Temperature class for the water meter, cold water (T30 and T50) and warm water (T70)

Configuration

flowIQ® 2200 – **KWM2231, KWM2230, KWM3230**

	DDD	JJ	LLL	MMMM	N	P	S	U	RR	CCC	V	T	YY	ZZZ
	□□□	□□	□□□	□□□□	□	□	□	□	□□	□□□	□	□	□□	□□□
Display views														
KWM2231, KWM2230, KWM3230	804													
GMT offset – time zone														
[GMT+1] (default)		52												
[GMT+2]		56												
[GMT-2]		40												
Target date														
1 st of the month														
Max values – average over time (1...120 min.)														
2 minutes			002											
Customer label														
Options are defined in order system				MMMM										
Leakage message limit														
Flow continuously > 0.25 % of Q ₃ /nom. flow					2									
Flow continuously > 0.5 % of Q ₃ /nom. flow (default)					3									
Flow continuously > 1.0 % of Q ₃ /nom. flow					4									
Flow continuously > 2.0 % of Q ₃ /nom. flow					5									
OFF					9									
Pipe burst limit														
OFF					0									
Flow > 5 % of Q ₃ /nom. flow for 30 minutes					1									
Flow > 10 % of Q ₃ /nom. flow for 30 minutes					2									
Flow > 20 % of Q ₃ /nom. flow for 30 minutes (default)					3									
Ambient temperature low limit														
Ambient temp. < 2 °C (default)							2							
OFF							0							
Ambient temperature high limit														
Ambient temp. > 35 °C (default)								3						
Ambient temp. > 45 °C								6						
OFF								0						
Data logger profile														
KWMx230									05					
KWMx231									17					
Display resolution (alphanumeric) – decimal markings (options defined by meter size)**														
000000.000 m ³ – 0000 L/h										010				
0000000.00 m ³ – 0000 L/h										020				
00000000.0 m ³ – 0000 L/h										030				
000000000 m ³ – 0000 L/h										040				
000000.000 m ³ – 00.00 m ³ /h										052				
0000000.00 m ³ – 000.0 m ³ /h										061				
0000000.00 m ³ – 00.00 m ³ /h										062				
00000000.0 m ³ – 00.00 m ³ /h										072				
000000000 m ³ – 00.00 m ³ /h										082				
**please see FILE 100004388 for available CCC-codes in relation to meter flow size														
To be continued on the next page...														

Configuration

	DDD	JJ	LLL	MMMM	N	P	S	U	RR	CCC	V	T	YY	ZZZ
	□□□	□□	□□□	□□□□	□	□	□	□	□□	□□□	□	□	□□	□□□
Continued from previous page														
Temperature units of measure														
Celsius (default)												0		
Encryption level														
Encryption with separately forwarded key (default)												3		
Encryption with separate key, with encrypted access to logs *												4		
Transmission behaviour														
See note ¹⁾ below													YY	
Data packages														
See note ²⁾ below														ZZZ

Unless otherwise stated in the order, Kamstrup supplies this configuration:

Leak	N = 3
Burst	P = 3
Ambient temp. low	S = 2
Ambient temp. high	U = 3
Temperature units	V = 0 (Celsius)
Encryption level	T = 3 *

¹⁾ JJ (time zone), CCC (unit, display resolution and billing units) and YYZZZ (datagram) are not predefined and must be chosen in the ordering system.

²⁾ Your Kamstrup sales contact can provide relevant module datasheets that give an overview of communication modules and data packages.

* T=4 is only available for NB-IoT module 82 and is mandatory.

Accessories

See 'Accessories list for Water Meters' on www.kamstrup.com.